


TECHNICAL FEATURES

MODEL:	CR.LUX ILIRIA NERO
SIZE:	120x120
THICKNESS(mm):	10.7
DATE:	10/07/2021
CODE:	046.120.0215.05150
GROUP:	GROUP BIa UNE-EN 14411 Annex G / SASO ISO 13006:2018 Annex G
TILE TYPE:	GL
FINISH:	CR LUX
FAMILY:	CR LUX-POLISHED GLAZED RECTIFIED PORCELAIN TILES
NUMBER OF DESIGNS:	

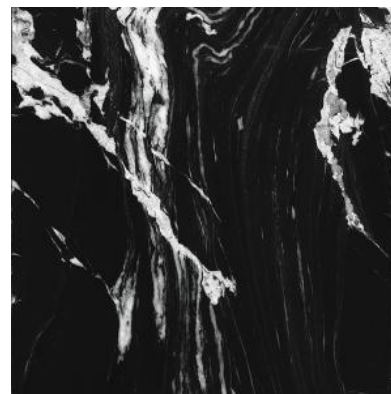

SKU:T11051

TEST	RESULT
UNE-EN ISO 10545-2 DIMENSIONAL FEATURES	COMPLIES WITH THE STANDARD
UNE-EN ISO 10545-3 WATER ABSORPTION	≤ 0,5 %
UNE-EN ISO 10545-4 MODULUS OF RUPTURE	1600-2400 N
	BREAKING STRENGTH
	35-45 N/mm2
UNE-EN ISO 10545-6 RESISTANCE TO DEEP ABRASION (MM3)	< 130 mm3
UNE-EN ISO 10545-7 RESISTANCE TO SURFACE ABRASION	PEI III
UNE-EN ISO 10545-8 LINEAR THERMAL EXPANSION	<7,0 x 10⁻⁶ °C⁻¹
UNE-EN ISO 10545-9 THERMAL SHOCK RESISTANCE	RESISTS
UNE-EN ISO 10545-11 CRAZING RESISTANCE	RESISTS
UNE-EN ISO 10545-12 FROST RESISTANCE	RESISTS
UNE-EN ISO 10545-13 CHEMICAL RESISTANCE - AMMONIUM CHLORIDE 100 G/L	A
	CHEMICAL RESISTANCE - SODIUM HYPOCHLORITE 20 MG/L
	A
	CHEMICAL RESISTANCE - HYDROCHLORIC ACID 3%
	COMPLIES WITH THE STANDARD
	CHEMICAL RESISTANCE - CITRIC ACID 100 G/L
	COMPLIES WITH THE STANDARD
	CHEMICAL RESISTANCE - POTASSIUM HYDROXYDE 30 G/L
	COMPLIES WITH THE STANDARD
UNE-EN ISO 10545-14 STAIN RESISTANCE - GREEN AGENT IN LIGHT OIL	5
	STAIN RESISTANCE - IODINE SOLUTION IN ALCOHOL
	5
	STAIN RESISTANCE - OLIVE OIL
	5